

M133C Series Options and Accessories

Option 10 Test Cable

Test cable black length 1m dimensioned for signals to 1000 V and 32 A

Option 11 Test Cable

Test cable red length 1m dimensioned for signals to 1000 V and 32 A

Option 12 Test Cable

Test cable blue length 1m dimensioned for signals to 1000 V and 32 A

Option 13 Test Cable

Test cable blue length 1m dimensioned for signals to 1000 V and 32 A

M133C-01 High Current Adapter (M133C, M133Ci three phase)

The adapter enables direct parallel connection of all three current outputs. Using the adapter single phase output current up to 90 A AC/DC can be delivered to UUT.



Option 140-50 Current Coil



25/50 turns current coil for calibration of clamp ammeters. Maximal range 1000 A.

Option 151-25 Current Coil



25-turn current coil is formed by copper wire. Current coil is equipped with two instrument AC clamp ammeters can be calibrated in range



coil of circular form. terminals. DC and to 2250

M133 Control Panel (freeware)

All parameters are displayed in computer where can be also changed. Setting can be saved as a computer file. Program displays vector diagram and shapes of individual signals.

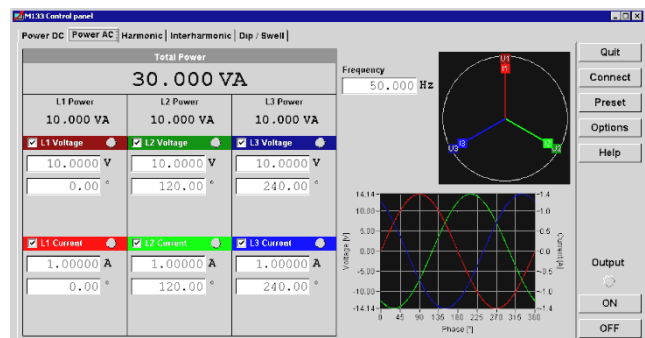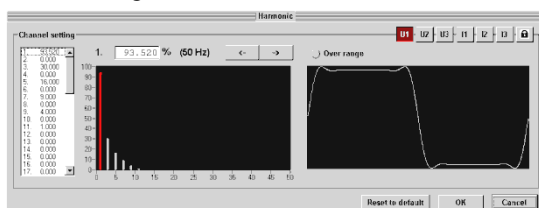

ANALOG
DIGITAL



ADM Messtechnik GmbH & Co. KG · Zum Wartturm 9 · 63571 Gelnhausen
Tel. (06051) 916557-1 · sales@adm-messtechnik.de · www.adm-messtechnik.de

MESSTECHNIK

ADM Messtechnik GmbH & Co. KG

GERÄTE UND SYSTEME FÜR FORSCHUNG · ENTWICKLUNG · VERSUCH · SERVICE